Page 1

Standard Construction and Materials

FRAME: .125" to .250" thick (nominal) extruded aluminum 6063-T52/T6 alloy.

Grille depth can be 2" to 6" deep.

BLADE: .125" to .250" thick (nominal) extruded aluminum 6063-T52/T6 alloy.

Blades can have 2" to 12" vertical and horizontal spacing

and horizontal blade angle from 0° to 45°.

CONSTRUCTION: All welded construction.


FINISH: Factory mill.


Options

Finishes - Kynar, Baked Enamel, Clear and Color Anodize

Grille Screen Sizes

Min Panel	Max Single Panel				
12"W x 12"H	60"W x 96"H (40 sq.ft.)				

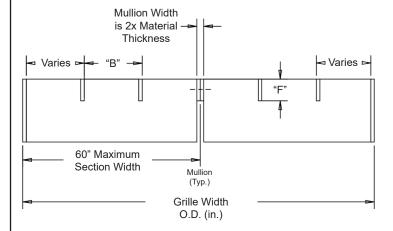

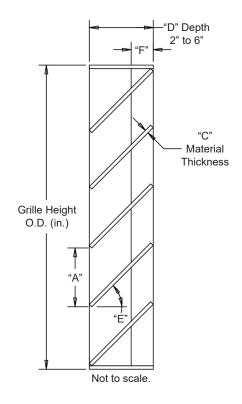

Channel Frame Angle Frame

Optional Frames

"A" = 2" to 12" (Horizontal Blade Spacing)

"B" = 2" to 12" (Vertical Blade Spacing)

"C" = .125" to .250" (Material Thickness)

"D" = 2" to 6" (Grille Depth)

"E" = 0° to 45° (Blade Angle)

"F" = 1" minimum (Vertical Blade Depth)

ltem #	<u>Oty</u>	Horizontal	Vertical	<u>Grille</u>					SILA
		Blade S	Spacing	<u>Depth</u>	Material ⁻	<u>Thickness</u>	<u>Blade Angle</u>		<u>Union Made</u>
Arch. /	' Eng. :			EDR:		ECN:		<u>Job:</u>	
<u>Cont</u>	ractor:								
<u>P</u>	roject:			<u>Date:</u>		<u>DWN:</u>		<u>DWG:</u>	

In the interest of product development, Cesco Products reserves the right to make changes without notice.

