


Transition Damper • 6½" Deep • Pin-Lock Blades • Parallel or Opposed • Round and Oval Transition • Extruded Aluminum

For use to 4 in. w.g. of static pressure

Standard Construction and Materials

- FRAME:** 1½" x 6½" x 1½" extruded aluminum channel frame with a .080" thick aluminum transition piece.
- BLADE:** Extruded aluminum, pin-lock design.
- SHAFT:** ½" dia. aluminum shaft, extends 7" beyond frame.
- BEARINGS:** Double-sealed.
- LINKAGE:** In jamb, out of air stream.
- FINISH:** Mill.

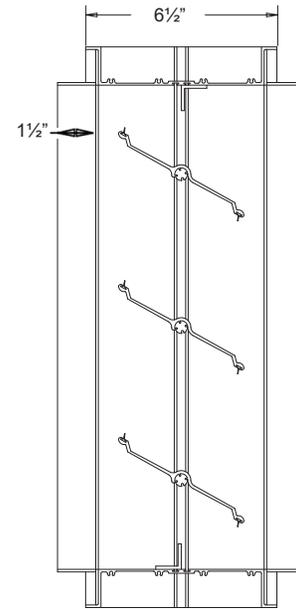


Parallel Blade Position
Not to scale.

Notes



1. ¼" nominal deduction will be made to the opening size given.
2. Please specify blade position: Parallel or Opposed.
3. Approximate shipping weight is 7 lbs./sq.ft.

Damper Sizes

| Min Size | Max Size |
|-------------|-------------|
| 10"W x 10"H | 48"W x 48"H |

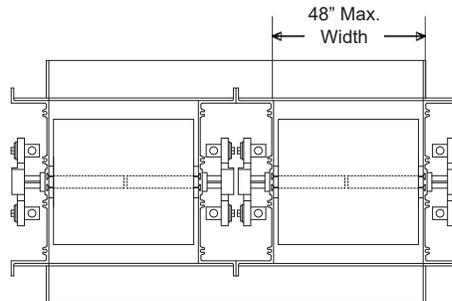

Opposed Blade Position

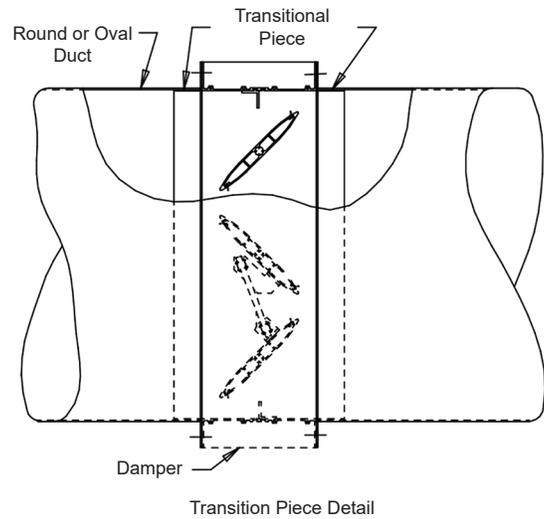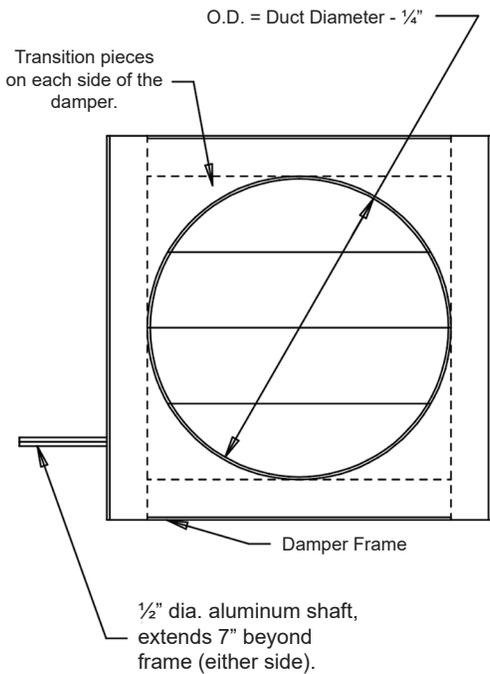

| | | | | | | | | |  |
|---------------|-----|-------------------|--------|----------------|---------|-----------------|------|------------|---|
| Item # | Qty | Width | Height | Parallel | Opposed | Round | Oval | | |
| Arch. / Eng.: | | Damper Size (in.) | | Blade Position | | Transition Type | | Union Made | |
| Contractor: | | Date: | | EDR: | | ECN: | | Job: | |
| Project: | | Date: | | DWN: | | DWG: | | | |

In the interest of product development, CESCO Products reserves the right to make changes without notice.



450 Riverside Dr • Wyalusing PA, 18853
 Phone: 570-746-1888 • Fax: 570-746-9286
 www.cescoproducts.com