

Standard Construction and Materials

LOUVER: Frame and blade are .081" thk. (nominal) extruded aluminum 6063-T52/T6 alloy, w/ post corner construction.

SCREEN: (When indicated, in a removable frame) 1/2" flattened aluminum, .051" thk.,

- or- Insect screen 1 3/16" aluminum mesh, .011" dia.,
- or- 1/2" sq. mesh intermediate double crimped aluminum wire, .063" dia.

FINISH: Varies.

SIZE: 38" x 38" x 18", sits on a curb 12" - 36" high.

CURB: 12 GA. Galvanneal, galvanized steel or 1/8" thk. (nominal) aluminum w/ 4" mounting flange, welded construction.

ROOF: .060" thk. (nominal) formed aluminum with 1/2" thk. (nominal) rigid insulation.

POST CORNER: .081" thk. (nominal) formed aluminum.

GLASS: 1/8" thk. (nominal) annealed glass.

ROOF OPENING: 28" x 28" minimum, 38" x 38" maximum.

Louver Details

MODEL: X4K4 (Cesco Products)

SIZE: 30" x 18" (4) four required.

FREE AREA: 6.54 sq. ft. Total.

Control Damper Details

MODEL: AAA (Cesco Products)

ACTUATOR: Internally mounted, Electric.

SIZE: 26" x 26" O.D. (nominal)

CORE AREA: 3.75 sq. ft.

MODEL: C395 (Cesco Products)


SIZE: 26" x 26" O.D. (nominal)

ACTUATOR: Internally mounted, Electric.

CORE AREA: 4.08 sq. ft.

Options

- Hinged louver with hasp or surface mount latch in place of access door in curb.
- Drainable blade louver (Model X4D3). (Cesco Products)

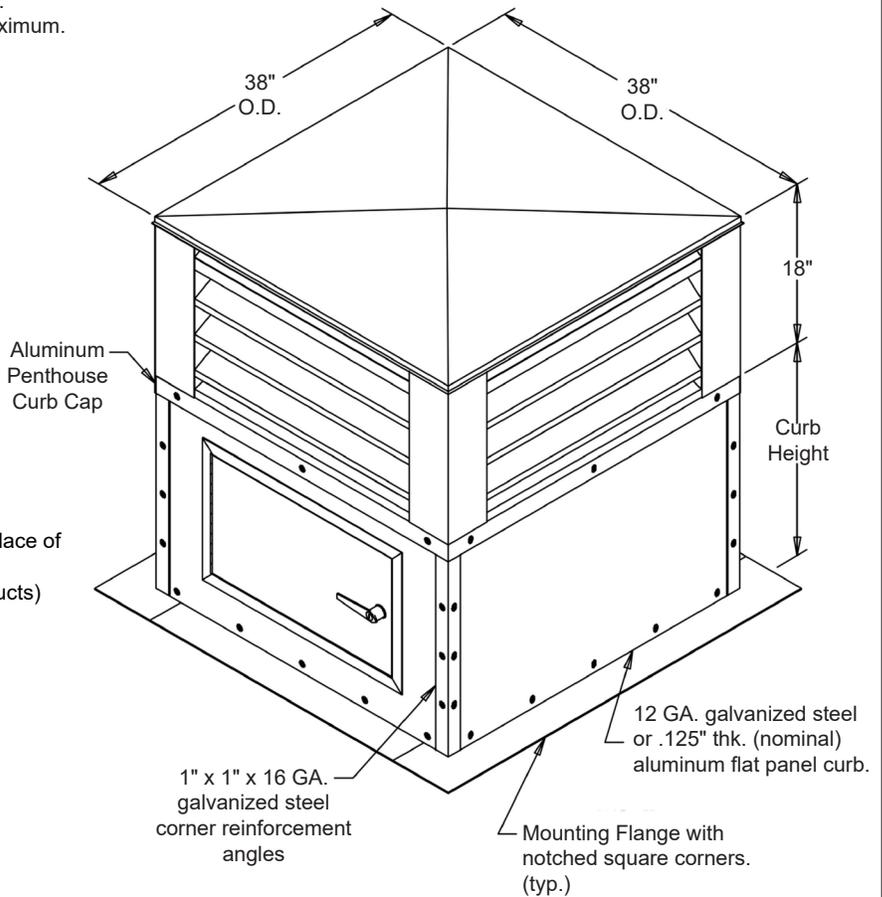

									 Union Made
Item #	Qty	Width	Height	Curb Height	Glass Access	Hinged Access	Tagging		
		Roof Opening							
Arch. / Eng. :				EDR:		ECN:		Job:	
Contractor:									
Project:				Date:		DWN:		DWG:	

In the interest of product development, Cesco Products reserves the right to make changes without notice.



450 Riverside Dr • Wyalusing PA, 18853
 Phone: 570-746-1888 • Fax: 570-746-9286
 www.cescoproducts.com

■ Penthouse Optional Construction

