

Extruded Aluminum Damper • 5" Deep • 6" Airfoil Blade • Opposed or Parallel • Thermal Break • Insulated Frame

**Standard Construction and Materials**

**FRAME:** 5" deep x .081" thick (nominal) 6063-T52/T6 extruded aluminum, .125" thick (nominal) frame also available. Frame is insulated with 1/2" rigid foam insulation.

**BLADES:** 6" wide x .081" thick (nominal) 6063-T52/T6 extruded aluminum, airfoil profile injected with a two-part polyurethane (CFC free) foam, and debridged for thermal isolation.

**AXLES:** 1/2" dia. extruded aluminum, "Pin-Lock" design, interlocking into blade section.


**LINKAGE:** Concealed in jamb of heavy aluminum. Crank arm permanently locked to blade axle by two stainless steel fasteners. The crank arm contains a 1/2" dia. metal pivot riding in a celcon bearing. A 1/4-20 set screw with locking patch ties the 5/16" dia. aluminum linkage rod. The linkage of each damper is individually adjusted.

**BEARINGS:** "Double-sealed" type with celcon inner bearing riding inside a polycarbonate outer bearing positively locked into frame, designed so that there shall be no metal-to-metal or metal-to-bearing riding surfaces.

**SEALS:** Extreme low temperature seal system, extruded silicone rubber blade edge seal that fits into a ribbed groove insert in blades with an extruded polycarbonate seal at jambs.

**FINISH:** Mill

**TEMP. LIMITS:** -40°F to +200°F

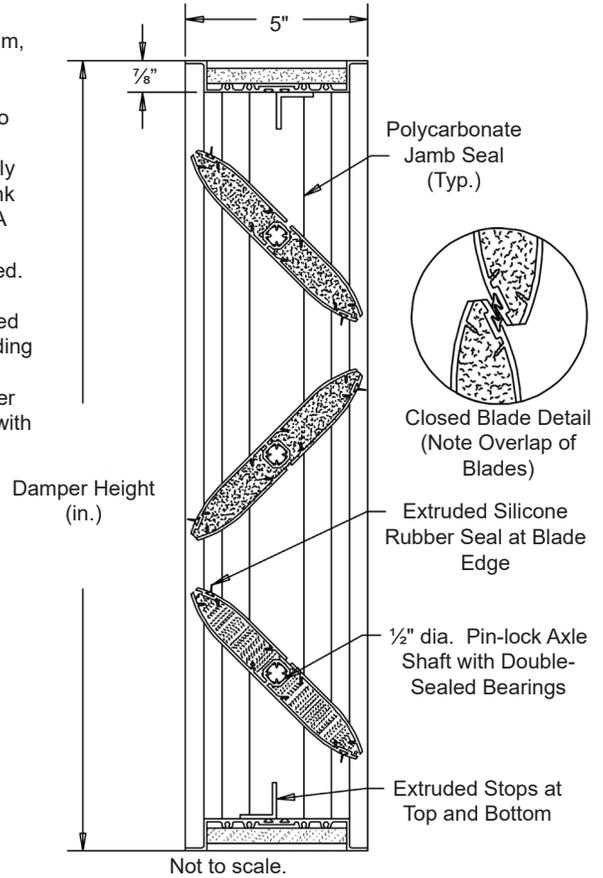

Opposed Blade Model shown (Parallel Blade Model also Available)

**Options**


- Frame - Optional .125" thick (nominal) 6063-T52/T6 extruded aluminum
- Hand Quadrants
- 120V, 24V Electric, or Pneumatic Actuators
- Jackshaftering
- Auxiliary Switch
- Explosion Proof Housing

**Notes**

1. 1/4" nominal deduction will be made to the opening size given.
2. Dampers with multiple panels in both width and height may require structural support. It is recommended that large openings be designed with structural members so that dampers will span either width or height with a single panel. Structural support will not be provided with standard dampers.
3. Dampers more than one panel wide or high and operated with one actuator must be jackshaftered. Factory supplied actuators are shipped loose to be mounted external as standard.
4. Dampers at minimum panel size will have a single damper blade.
5. Not recommended for blades installed vertically.
6. Approximate shipping weight is 6.5 lbs./sq.ft.

**Damper Sizes**

Blade Type	Minimum Panel	Maximum Panel
Parallel	6"W x 8 7/8"H	60"W x 72"H
Opposed	6"W x 8 7/8"H	60"W x 72"H

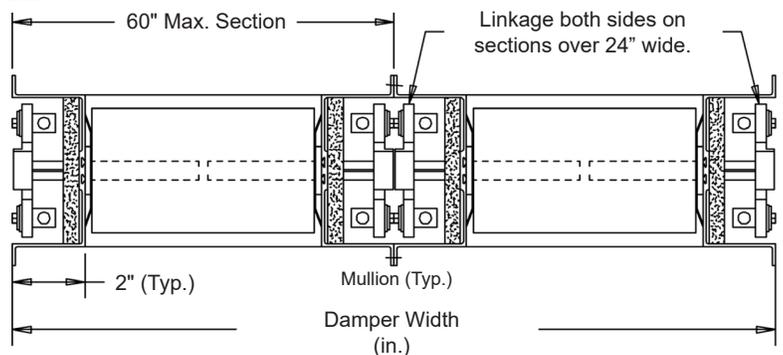

Item #	Qty	Width	Height	Para.	Oppo.	Actuator Model	Interior	Exterior	N.C.	N.O.	Union Made	
Arch. / Eng.:		Damper Size		Blade Position			Location		Function			
Contractor:						E.D.R.:		ECN:		Job:		
Project:						Date:		DWN:		DWG:		

In the interest of product development, CESCO Products reserves the right to make changes without notice.



450 Riverside Dr • Wyalusing PA, 18853  
 Phone: 570-746-1888 • Fax: 570-746-9286  
 www.cescoproducts.com